

PLAN VIEW

SIDEWALK JOINTING DETAIL

NTS

REVISION	DATE


CITY OF
UMATILLA
OREGON

STANDARD STREET DETAILS
SIDEWALK JOINTING DETAIL

FIGURE
R3.2

GENERAL NOTES

1. ALTERNATE APRON SLOPE 4" IS USED ONLY WHERE PLANS DESIGNATE. ALTERNATE APRON SLOPE MAY ALSO BE USED AT LOCAL JURISDICTIONS REQUEST AND/OR WHEN APPROVED BY THE PROJECT MANAGER.
2. SLOPES - SHOULDER GRADE = 12% MAX. IN SAG AND 0% MAX. IN CREST.
3. TOOLED JOINTS ARE REQUIRED AT ALL SIDEWALK RAMP SLOPE BREAK LINES.

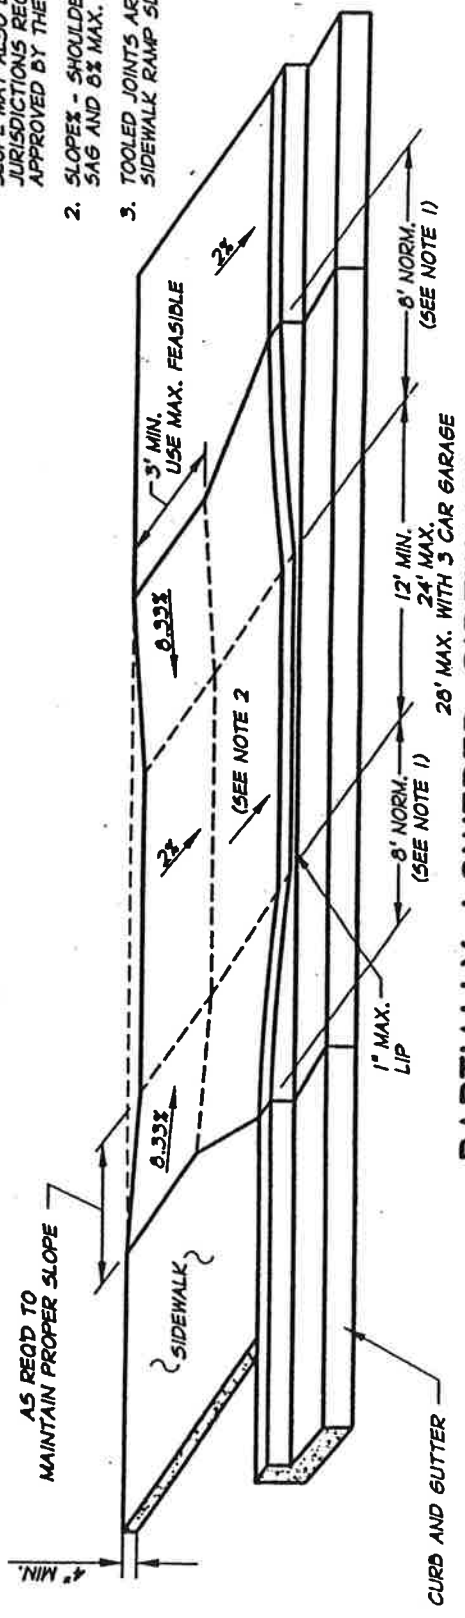

PARTIALLY LOWERED SIDEWALK


N.T.S.

REVISION	DATE

CITY OF
UMATILLA
OREGON

STANDARD STREET DETAILS
DRIVEWAY/ALLEY APPROACH

FIGURE
R3.3

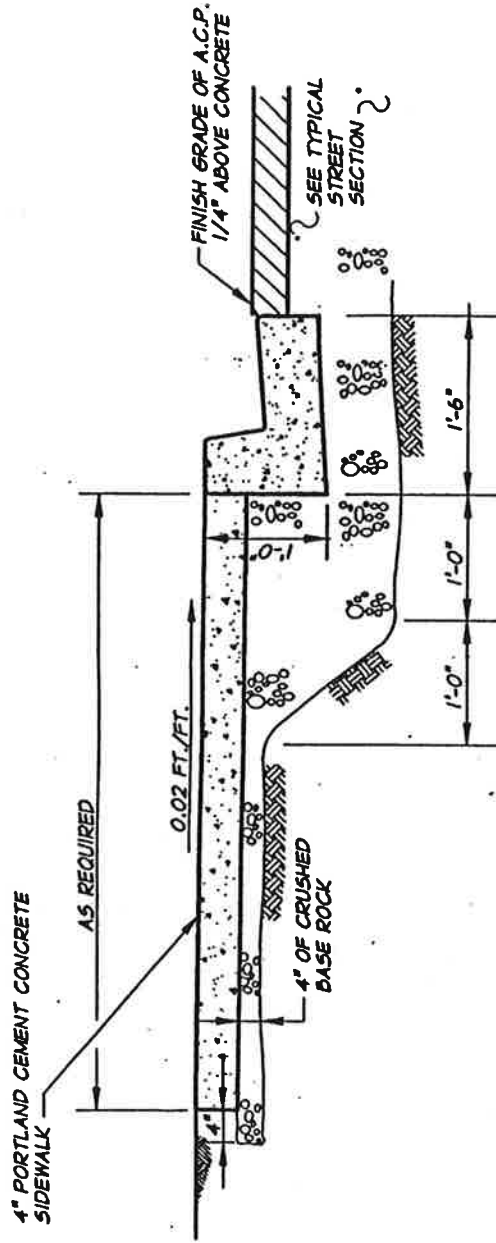

SIDEWALK/CURB AND GUTTER DETAIL
 (FOR CURBSIDE SIDEWALK)

REVISION	DATE

CITY OF
 UMATILLA
 OREGON

STANDARD STREET DETAILS
 SIDEWALK / CURB AND GUTTER DETAIL

FIGURE
R3.1